


PUMI® 28-4.67 CS

Truck-mounted concrete pump with mixer

CS transfer tube system

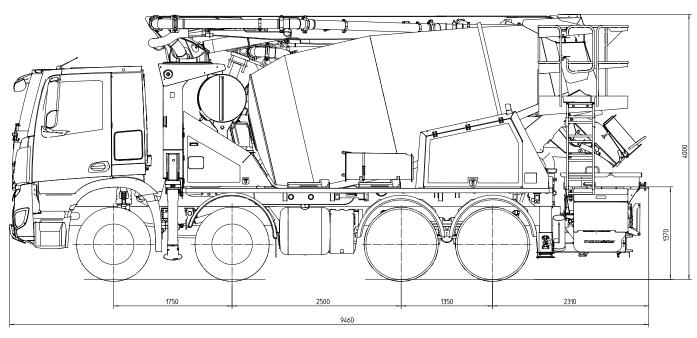

Note: Standard version. Subject to technical modifications and errors. Dimensions in mm, for example MB-Arocs, dimensions depending on the vehicle. Pictures contain optional equipments.

Technical data

| Boom TMM | 28-4 | | |
|------------------|-------|---|--------------|
| Number of arms | | | 4 |
| Reach height | | m | 27.5 |
| Horizontal | gross | m | 23.0 |
| reach | net | m | 20.3 |
| Reach depth max. | | m | 16.9 |
| Unfolding height | | m | 6.3 |
| End hose length | | m | 3 |
| Folding system | | | Z fold (Z) |
| Delivery line | | | DN 100 - 4.5 |

| Pump TMP 60 CS | | |
|-------------------|------|-----|
| Output | m³/h | 56 |
| Delivery pressure | bar | 57 |
| Delivery cylinder | Ø mm | 230 |
| Stroke | mm | 700 |


Maximum outputs of $56\ m^3/h$ and maximum concrete pressures of $57\ bar$ may be achieved, depending on the equipment of the machine.

It is not possible to achieve maximum outputs and maximum concrete pressures simultaneously.


All data maximum theoretical.

| Truck mixer 7 cbm | | |
|-------------------|-----|------|
| Nominal capacity | m³ | 7 |
| Filling ratio | % | 60 |
| Drum speed | rpm | 1-14 |
| Water tank | 1 | 630 |

Reach information diagram

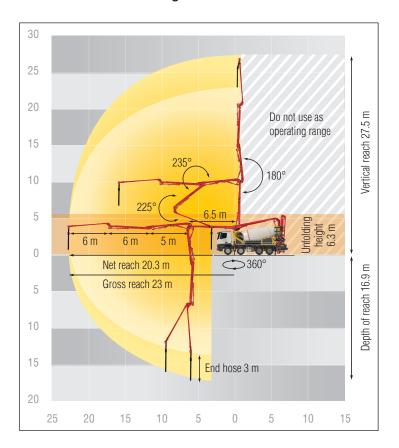

Support



Delivery scope Standard Line

| Agitator radio remot/on site controlled |
|--|
| Agitator safety switch off (RFID) |
| Box for sponge balls |
| Bracket for hammer and trowel |
| Cardan shaft maintenance free |
| Casted elbow with cleaning port |
| Central lubrication drum rollers, manual |
| Central lubrication hinge first arm, manual |
| Central lubrication hopper, electrically |
| Chute adjustment hydraulic-electrically |
| Cleaning spray hose incl. bracket and spray nozzle |
| Commpressed air connection rear side |
| Concrete hopper with agitator |
| Connection for watertank filling, right side |
| Cover for hopper |
| Delivery cylinder chromium plated |
| Delivery line (1-layer) PM40 DN100 |
| Delivery note-box |
| |

| Bonvery ploton long inc |
|--|
| Drawbar eye |
| EMC – Ergonic Mixer Control |
| End hose 3m |
| EOC – Ergonic Output Control |
| EPS – Ergonic Pump System |
| ESC – Ergonic Setup System |
| Lighting all control elements |
| Lighting hopper, mounted |
| Lockable storage space |
| Mixer drum with 4 end spiral plates |
| Mudgard plastic |
| Operating manuals (1 \times paper, 1 \times CD-ROM), spare part list |
| Paint: 4-color putzmeister standard |
| Platform for cleaning with drop guard |
| Radio remote control with display |
| Rubber collar on concrete hopper |
| |

Delivery piston "long life"

| Second drip ring on mixer drum |
|-------------------------------------|
| Slewable and folding chute, steal |
| Standard support system (incl. ESC) |
| Support plates 4× |
| Tool set incl. standard equipment |
| Wash-out port lid with slide pin |
| Water supply mixer (remote/on site) |
| Water tank 630 I, pressure tank |
| Water tap under water tank |
| |

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@pmw.de Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 1707